


Technische Änderungen vorbehalten, alle Angaben ohne Gewähr / Subject to technical modifications; no responsibility is accepted for the accuracy of this information. © EUCHNER GmbH + Co. KG

Maße in mm / Dimensions in mm




A1
Handrad 100 Impulse
handwheel 100 pulses
RS422 A
A05





X1/6 0V	WH	ws	18
X1/5 +UB: DC5V ±5%	BN	br	19
X1/1 A	GN	gn	23
X1/2 Ā	YE	ge	22
X1/3 B	GY	gr	21
X1/4 B̄	PK	rs	20

S1
NOT-AUS
emergency-stop




	BU	bl	1
	RD	rt	2
	BK	sw	3
	VT	vi	4

S2
Zustimmtaster links
enabling switch left
ZXE



X2/3		RDWH	wsrt	7
X2/2				
X2/4		RDBU	rtbl	5
X2/1		WHPK	wsrs	6


S3
Taste "+"
push button "+"
S4
Taste "-"
push button "-"
S5
Taste "~"
push button "~"
S6
Taste "F1"
push button "F1"
S7
Taste "F2"
push button "F2"
S8
Taste "F3"
push button "F3"

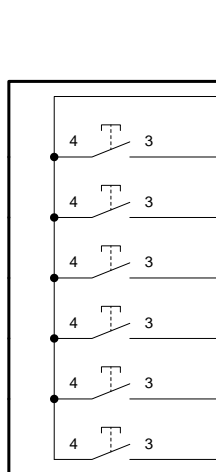

X4/1	X7/1	X4/2	GYPK	grrs	16
	X7/3	X3/3	GNWH	wsgn	11
	X7/4	X3/5	BNGN	brgn	12
	X7/5	X3/2	YEPH	wsge	13
	X7/6	X3/4	BNYE	gebr	14
	X7/7	X3/1	GYWH	wsgr	15
	X7/2	X3/6	BNGY	qrbr	17

S9	DCBA	
1	0011	0
2	0010	Z
3	0110	X
4	0111	Y
5	0101	4
6	0100	5

S9
Stufenschalter rechts
6 Stellungen
selector switch right
6 positions



X4/3		BNBU	brbl	8
X4/4		BUWH	wsbl	9
X4/5		BNPK	rsbr	10
X4/6				

Stifte
nicht angeschlossen/
pins
not connected:

24
25
26

Schirm / shield

Adern 0,14² / wires 0,14²

Steckverbinder
Coninvers Metall, 26-polig, ccw

plug connector
Coninvers metal, 26-pin, ccw