

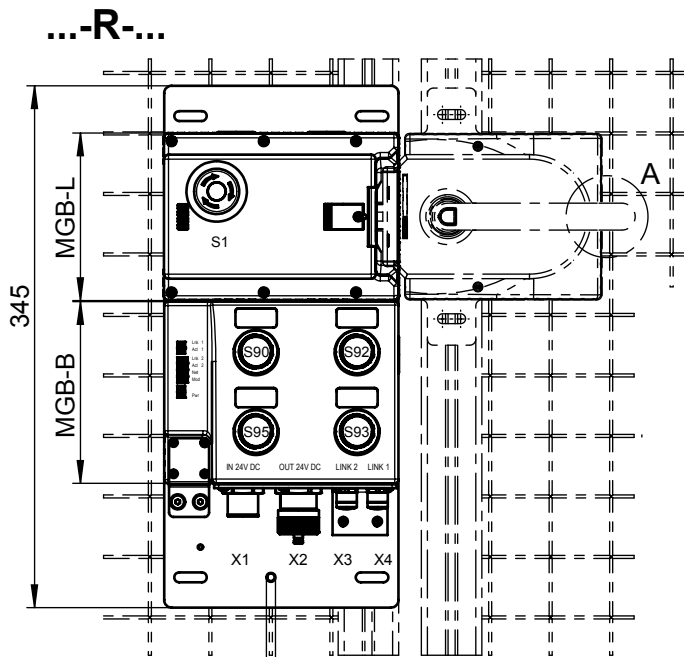


Technische Änderungen vorbehalten, alle Angaben ohne Gewähr / Subject to technical modifications; no responsibility is accepted for the accuracy of this information. © EUCHNER GmbH + Co. KG

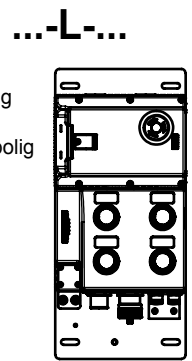

- X1** 7/8" Power (Stecker/ male) 4-polig
- X2** 7/8" Power (Buchse/ female) 4-polig
- X3 / X4** M12 D-coded (Buchse/ female) 4-polig

Detail A
 Sperrverriegelung im ausgefahrenen Zustand
 Automatic lockoutbar in "open" position.



inklusive M6
 Funktionserde
 function earth
 included

Blenden-Set für Taster inklusive:
Lens-Set for push-buttons included:

- 2x weiss / white
- 1x blau / blue
- 1x gelb / yellow
- 1x grün / green
- 1x rot / red



| | MGBH | MGB-L... | MGB-E.. | Türanschlag Door hinge | S1 (ES) | S90 | S92 | S93 | S95 |
|------------------------------|------|----------|---------|---------------------------|----------------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| MGB-L1B-EIA-R-136468 | | X | | R | NOT-HALT Taster beleuchtet | Taster beleuchtet | Taster beleuchtet | Taster beleuchtet | Taster beleuchtet |
| MGB-L1HB-EIA-R-159094 | X | X | | | | | | | |
| MGB-L2B-EIA-R-136510 | | X | | | | | | | |
| MGB-L2HB-EIA-R-158023 | X | X | | L | Emergency stop illuminated | Push-button illuminated | Push-button illuminated | Push-button illuminated | Push-button illuminated |
| MGB-L1B-EIA-L-136480 | | X | | | | | | | |
| MGB-L1HB-EIA-L-159095 | X | X | | | | | | | |
| MGB-L2B-EIA-L-136524 | | X | | | | | | | |
| MGB-L2HB-EIA-L-158024 | X | X | | | | | | | |

Inklusive:
 4 Stück Einlegeschilder
 silberfarben, selbstklebend.
 Ohne Aufschrift (12,5x27mm)

Included:
 4 pcs. insertion plates, silver,
 self-adhesive.
 Without inscription (12,5x27mm)

EtherNet / IP

| Datenbytes / Data bytes | Eingangsbereich / Input range: | Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
|--|---|------------------|-------------------------|-----------|-------|------|-------|-----|------|------|-------|
| Standardfunktionen Standard functions | Connection header | Byte 0 | - | - | - | - | DA | CF | RM | | |
| | Connection header | Byte 1 | DiagnosticSequenceCount | | | | | | | | |
| | Connection header | Byte 2 | - | - | - | - | - | - | - | - | |
| | Connection header | Byte 3 | - | - | - | - | - | - | - | - | |
| | Sichere Funktionen Safe functions (FI) | Failsafe input 0 | Byte 4 | - | - | - | - | - | - | - | FI.ES |
| | | Failsafe input 1 | Byte 5 | FI.UK | FI.SK | - | - | - | FI.L | FI.B | FI.D |
| | | Input 0 | Byte 6 | - | - | - | S92.1 | - | - | - | S90.1 |
| | Standardfunktionen Standard functions | Input 1 | Byte 7 | - | - | - | S95.1 | - | - | - | S93.1 |
| | | Input 2 | Byte 8 | - | - | - | - | - | - | - | - |
| | | Diagnostics | Byte 9 | D.LT | - | D.OL | - | - | D.ES | D.PF | - |
| | | Fault code | Byte 10 | FaultCode | | | | | | | |
| Fault code | | Byte 11 | FaultCode | | | | | | | | |
| Sichere Funktion Safe function (FO.) | Failsafe output 0 | Byte 0 | - | - | - | - | - | - | - | FO.L | |
| | Output 0 | Byte 1 | - | - | H95 | - | H93 | H92 | - | H90 | |
| | Output 1 | Byte 2 | - | - | - | - | - | - | - | H1 | |
| | Control and ACK | Byte 3 | Q.PF | Q.G | - | - | - | - | - | - | |

- DA = Diagnostic active
- FI.SK = D and B
- D.LT = Lifetime
- CF = Connection faulted
- FI.L = Guard locking
- D.OL = Guard locking
- RM = Run mode
- FI.B = Bolt position
- D.ES = Emergency stop
- FI.UK = D and B and L
- FI.D = Door position
- D.PF = Plausibility fault
- FO.L = Guard locking
- Q.PF = Acknowledge plausibility fault
- Q.G = Acknowledge all