


Maße in mm / Dimensions in mm

© EUCHNER GmbH + Co. KG

no responsibility is accepted for the accuracy of this information.




Technische Änderungen vorbehalten, alle Angaben ohne Gewähr / Subject to technical modifications; alle Angaben ohne Gewähr

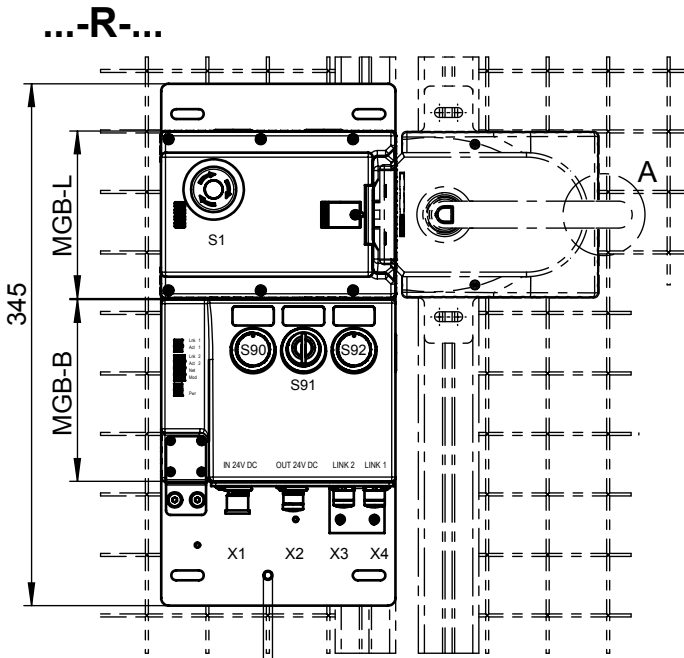

inklusive M6
Funktionserde
function earth
included

- X1** M12 A-coded (Stecker/ male) 4-polig
- X2** M12 A-coded (Buchse/ female) 4-polig
- X3 / X4** M12 D-coded (Buchse/ female) 4-polig

Detail A
Sperrverriegelung im
ausgefahrenen Zustand
Automatic lockoutbar in "open" position.

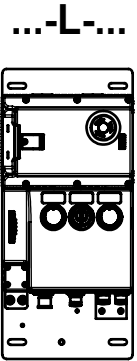

	MGB-H	MGB-L...	MGB-E...	Türanschlag Door hinge	S1	S90 Taster beleuchtet Push-button illuminated	S91 Schlüsselschalter Key-operated rotary switch	S92 Taster beleuchtet Push-button illuminated
MGB-L1B-EIA-R-136470		X		R	NOT-HALT Taster beleuchtet	WEISS WHITE	RASTEND LATCHING 1x90°, Form L 0+1 = Schlüssel abziehbar 0+1 = Key removable	WEISS WHITE
MGB-L1HB-EIA-R-159477	X	X						
MGB-L1B-EIA-L-136482		X		L	Emergency stop illuminated			
MGB-L1HB-EIA-L-159478	X	X						

Inklusive:
3 Stück Einlegeschilder
silberfarben, selbstklebend.
Ohne Aufschrift (12,5x27mm)

Included:
3 pcs. insertion plates, silver,
self-adhesive.
Without inscription (12,5x27mm)

EtherNet / IP

Datenbytes / Data bytes
Datenblöcke / Data blocks

Eingangsbereich / Input range:

	Bit	7	6	5	4	3	2	1	0	
Standardfunktionen Standard functions	Connection header	Byte 0	-	-	-	-	DA	CF	RM	
	Connection header	Byte 1	DiagnosticSequenceCount							
	Connection header	Byte 2	-	-	-	-	-	-	-	
	Connection header	Byte 3	-	-	-	-	-	-	-	
Sichere Funktionen Safe functions (FI)	Failsafe input 0	Byte 4	-	-	-	-	-	-	FI.ES	
	Failsafe input 1	Byte 5	FL.UK	FL.SK	-	-	FI.L	FI.B	FI.D	
	Input 0	Byte 6	-	-	-	S92.1	-	S91.1	-	
	Input 1	Byte 7	-	-	-	-	-	-	-	
	Input 2	Byte 8	-	-	-	-	-	-	-	
Standardfunktionen Standard functions	Diagnostics	Byte 9	D.LT	-	D.OL	-	-	D.ES	D.PF	
	Fault code	Byte 10	FaultCode							
	Fault code	Byte 11	FaultCode							

Ausgangsbereich / Output range:

	Bit	7	6	5	4	3	2	1	0
Sichere Funktion Safe function (FO.)	Failsafe output 0	Byte 0	-	-	-	-	-	-	FO.L
	Output 0	Byte 1	-	-	-	-	H92	-	H90
	Output 1	Byte 2	-	-	-	-	-	-	H1
Standardfunktionen Standard functions	Control and ACK	Byte 3	Q.PF	Q.G	-	-	-	-	-

DA = Diagnostic active
CF = Connection faulted
RM = Run mode
FL.UK = D and B and L

FL.SK = D and B
FI.L = Guard locking
FI.B = Bolt position
FI.D = Door position

D.LT = Lifetime
D.OL = Guard locking
D.ES = Emergency stop
D.PF = Plausibility fault

FO.L = Guard locking
Q.PF = Acknowledge plausibility fault
Q.G = Acknowledge all

Betriebsanleitung beachten
(bei Abweichungen zwischen
Datenblatt u. Betriebsanleitung
gelten die Daten des Datenblattes)

**Please observe the
operating instructions**
(in case of disagreement between
data sheet and operating instructions,
the information of the data sheet
are to be considered)