



Technische Änderungen vorbehalten, alle Angaben ohne Gewähr / Subject to technical modifications; no responsibility is accepted for the accuracy of this information. © EUCHNER GmbH + Co. KG

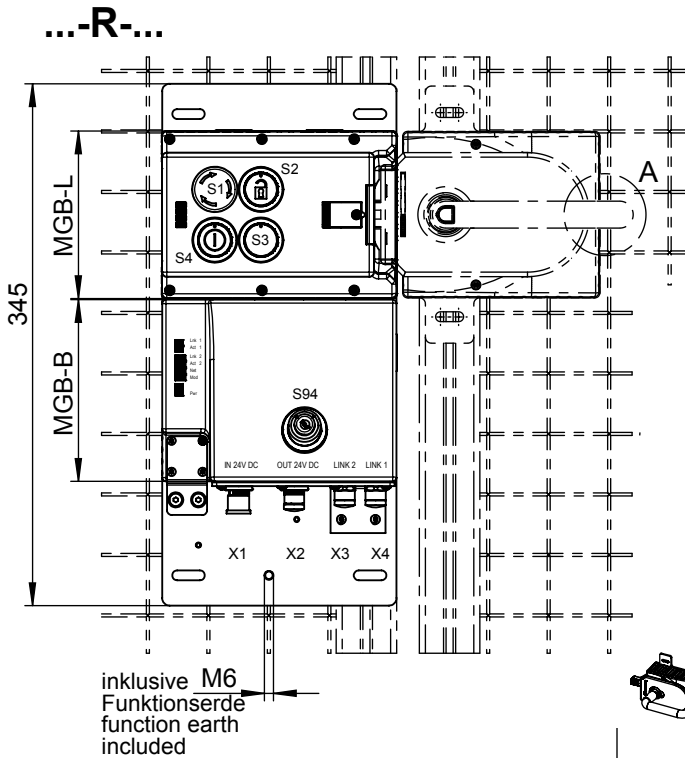

- X1** M12 A-coded (Stecker/ male) 4-polig
- X2** M12 A-coded (Buchse/ female) 4-polig
- X3 / X4** M12 D-coded (Buchse/ female) 4-polig

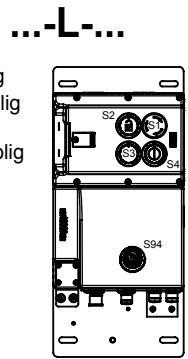

	MGB-H	MGB-L...	MGB-E..	Türanschlag Door hinge	S1 (ES)	S2 Taster beleuchtet Push-button illuminated	S3 Taster beleuchtet Push-button illuminated	S4 Taster beleuchtet Push-button illuminated	S94 Schlüsselschalter key-operated rotary switch
MGB-L1B-EIA-R-136466		X		R	NOT-HALT Taster Emergency stop	WEISS WHITE	ROT RED	GRÜN GREEN	RASTEND LATCHING 1x90°, Form V 0 = Schlüssel abziehbar 0 = Key removable
MGB-L1HEB-EIA-R-136467	X	X	X						
MGB-L1B-EIA-L-136464		X		L					
MGB-L1HEB-EIA-L-136465	X	X	X						
MGB-L1B-EIA-R-136469		X		R					
MGB-L1HEB-EIA-R-158421	X	X	X						
MGB-L1B-EIA-L-136481		X		L					
MGB-L1HEB-EIA-L-158423	X	X	X						

EtherNet / IP

Datenbytes / Data bytes		Eingangsbereich / Input range:		Bit											
Datenblöcke / Data blocks															
Standardfunktionen Standard functions	Connection header	Byte 0	-	-	-	-	DA	CF	RM						
	Connection header	Byte 1	DiagnosticSequenceCount												
	Connection header	Byte 2	-	-	-	-	-	-	-	-					
	Connection header	Byte 3	-	-	-	-	-	-	-	-					
	Connection header	Byte 4	-	-	-	-	-	-	-	-	FI.ES				
Sichere Funktionen Safe functions (FI.)	Failsafe input 0	Byte 5	FI.UK	FI.SK	-	-	-	FI.L	FI.B	FI.D					
	Failsafe input 1	Byte 6	-	-	-	-	-	-	-	-					
Standardfunktionen Standard functions	Input 0	Byte 7	-	-	-	-	-	S94.1	-	-					
	Input 1	Byte 8	-	S4.1	-	S3.1	-	S2.1	-	-					
	Input 2	Byte 9	D.LT	-	D.OL	-	-	D.ES	D.PF	-					
	Diagnostics	Byte 10	FaultCode												
	Fault code	Byte 11	FaultCode												
		Ausgangsbereich / Output range:		Bit											
Sichere Funktion Safe function (FO.)	Failsafe output 0	Byte 0	-	-	-	-	-	-	-	-	-	-	FO.L		
Standardfunktionen Standard functions	Output 0	Byte 1	-	-	-	-	-	-	-	-	-	-			
	Output 1	Byte 2	-	-	-	-	H4	H3	H2	-	-	-			
	Control and ACK	Byte 3	Q.PF	Q.G	-	-	-	-	-	-	-	-			

DA = Diagnostic active FI.SK = D and B D.LT = Lifetime FO.L = Guard locking
 CF = Connection faulted FI.L = Guard locking D.OL = Guard locking Q.PF = Acknowledge plausibility fault
 RM = Run mode FI.B = Bolt position D.ES = Emergency stop Q.G = Acknowledge all
 FI.UK = D and B and L FI.D = Door position D.PF = Plausibility fault