



...-R-...

...-L-...


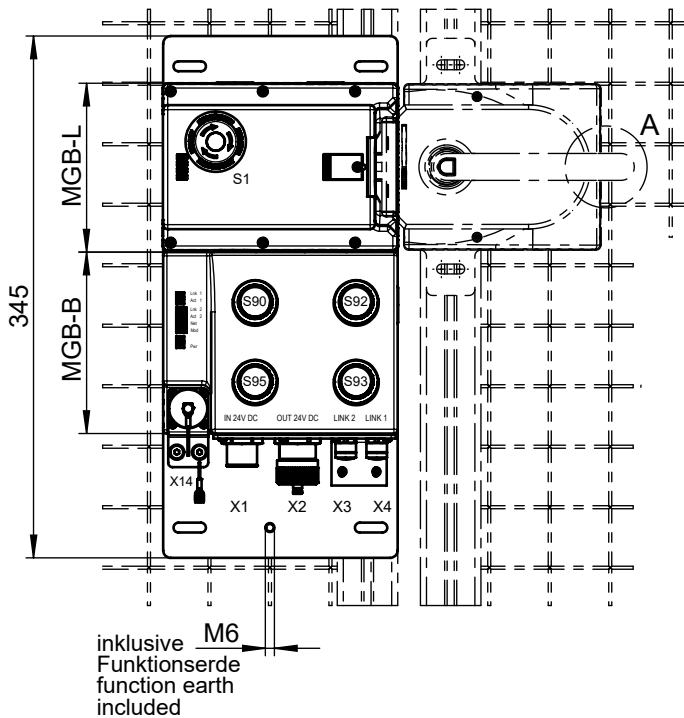


- X1** 7/8" Power (Stecker / male) 4-polig
X2 7/8" Power (Buchse / female) 4-polig
X3 / X4 M12 D-coded (Buchse / female) 4-polig
X14 RC12 (Buchse / female)
ES (Zustimmaster / Enabling Switch)

Anschlussbelegung / PIN assignment

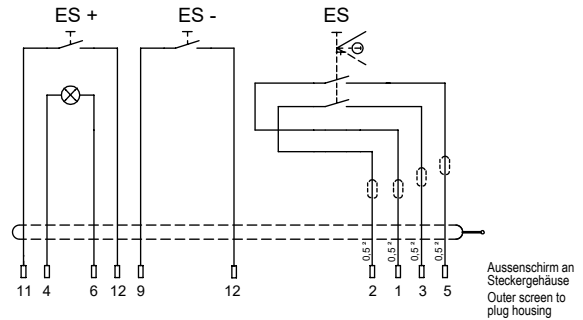**Detail A**

Sperrverriegelung im
ausgefahren Zustand
Automatic lockoutbar in "open" position.



	MGB-H...	MGB-L...	MGB-E...	Türanschlag Door hinge	S1 NOT-HALT Taster beleuchtet Emergency stop illuminated	S90 Taster beleuchtet Push-button illuminated	S92 Taster beleuchtet Push-button illuminated	S93 Taster beleuchtet Push-button illuminated	S95 Taster beleuchtet Push-button illuminated
MGB-L2B-EIA-R-136512		X		R					
MGB-L2HEB-EIA-R-162796	X	X	X		X	X	X	X	X
MGB-L2B-EIA-L-136526		X		L					
MGB-L2HEB-EIA-L-162797	X	X	X						

Blenden-Set für Taster inklusive:
Lens-Set for push-buttons included:

- 2x weiss / white
 1x blau / blue
 1x gelb / yellow
 1x grün / green
 1x rot / red

Betriebsanleitung beachten

(bei Abweichungen zwischen
 Datenblatt u. Betriebsanleitung
 gelten die Daten des Datenblattes)

Please observe the operating instructions

(in case of disagreement between
 data sheet and operating instructions,
 the information of the data sheet
 are to be considered)

EtherNet / IP

Datenbytes / Data bytes
 Datenblöcke / Data blocks

Standardfunktionen Standard functions	Connection header
Sichere Funktionen Safe functions (FI)	Failsafe input 0
Standardfunktionen Standard functions	Input 0
	Input 1
	Input 2
	Diagnostics
	Fault code
	Fault code

Eingangsbereich / Input range:

Bit	7	6	5	4	3	2	1	0
Byte 0	-	-	-	-	-	DA	CF	RM
Byte 1	DiagnosticSequenceCount							
Byte 2	-	-	-	-	-	-	-	-
Byte 3	-	-	-	-	-	-	-	-
Byte 4	-	-	-	-	-	-	-	F.I.S
Byte 5	F.I.UK	F.I.SK	-	-	-	F.I.L	F.I.B	F.I.D
Byte 6	EN-S1	-	-	S92.1	-	-	-	S90.1
Byte 7	EN-S2	-	-	S95.1	-	-	-	S93.1
Byte 8	-	-	-	-	-	-	-	-
Byte 9	D.LT	-	D.OL	-	D.EN	D.ES	D.PF	-
Byte 10	FaultCode							
Byte 11	FaultCode							

Ausgangsbereich / Output range:

Bit	7	6	5	4	3	2	1	0
Byte 0	-	-	-	-	-	-	-	FO.L
Byte 1	-	-	H95	-	H93	H92	-	H90
Byte 2	EN-H2	-	-	-	-	-	-	H1
Byte 3	Q.PF	Q.G	-	-	-	-	-	-

DA = Diagnostic active
 CF = Connection faulted
 RM = Run mode
 F.I.UK = D and B and L

F.I.SK = D and B
 F.I.L = Guard locking
 F.I.B = Bolt position
 F.I.D = Door position

D.LT = Lifetime
 D.OL = Guard locking
 D.ES = Emergency stop
 D.PF = Plausibility fault

FO.L = Guard locking
 Q.PF = Acknowledge plausibility fault
 Q.G = Acknowledge all