

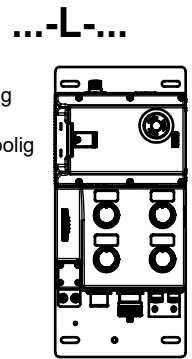


Maße in mm / Dimensions in mm
© EUCHNER GmbH + Co. KG
no responsibility is accepted for the accuracy of this information.
Technische Änderungen vorbehalten, alle Angaben ohne Gewähr / Subject to technical modifications;
Technical changes reserved, all data without warranty

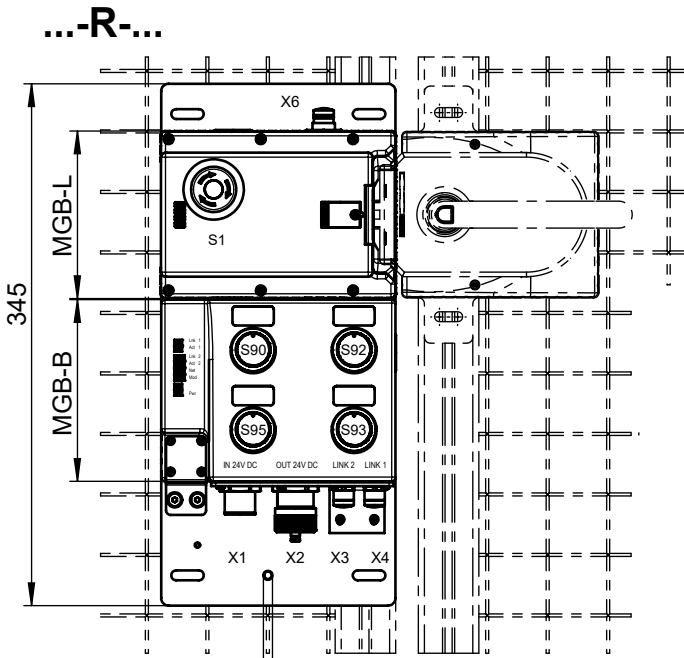


- X1** 7/8" Power (Stecker/ male) 4-polig
- X2** 7/8" Power (Buchse/ female) 4-polig
- X3 / X4** M12 D-coded (Buchse/ female) 4-polig

X6 (Signal stack modul)
M12 5-polig (Buchse) - nicht ausgerichtet
M12 5-pin (female) - not aligned



inklusive M6
Funktionserde
function earth
included



	MGB-H...	MGB-L...	MGB-E...	Türanschlag Door hinge	S1 (ES)	S90 Taster beleuchtet Push-button illuminated	S92 Taster beleuchtet Push-button illuminated	S93 Taster beleuchtet Push-button illuminated	S95 Taster beleuchtet Push-button illuminated
MGB-L2B-EIA-R-136511		X		R	NOT-HALT Taster beleuchtet	ROT RED	GRUEN GREEN	GELB YELLOW	GRUEN GREEN
MGB-L2HEB-EIA-R-161479	X	X	X						
MGB-L2B-EIA-L-136525		X		L	Emergency stop illuminated				
MGB-L2HEB-EIA-L-161480	X	X	X						

Inklusive:
4 Stück Einlegeschilder
silberfarben, selbstklebend.
Ohne Aufschrift (12,5x27mm)

Included:
4 pcs. insertion plates, silver,
self-adhesive.
Without inscription (12,5x27mm)

EtherNet / IP

Datenbytes / Data bytes
Datenblöcke / Data blocks

Eingangsbereich / Input range:

	Bit	7	6	5	4	3	2	1	0	
Standardfunktionen Standard functions	Connection header	Byte 0	-	-	-	-	DA	CF	RM	
	Connection header	Byte 1	DiagnosticSequenceCount							
	Connection header	Byte 2	-	-	-	-	-	-	-	
	Connection header	Byte 3	-	-	-	-	-	-	-	
Sichere Funktionen Safe functions (FI.)	Failsafe input 0	Byte 4	-	-	-	-	-	-	FI.ES	
	Failsafe input 1	Byte 5	FI.UK	FI.SK	-	-	FI.L	FI.B	FI.D	
Standardfunktionen Standard functions	Input 0	Byte 6	-	-	-	S92.1	-	-	S90.1	
	Input 1	Byte 7	-	-	-	S95.1	-	-	S93.1	
	Input 2	Byte 8	-	-	-	-	-	-	-	
	Diagnostics	Byte 9	D.LT	-	D.OL	-	-	D.ES	D.PF	
	Fault code	Byte 10	FaultCode							
	Fault code	Byte 11	FaultCode							

Ausgangsbereich / Output range:

	Bit	7	6	5	4	3	2	1	0
Sichere Funktion Safe function (FO.)	Failsafe output 0	Byte 0	-	-	-	-	-	-	FO.L
Standardfunktionen Standard functions	Output 0	Byte 1	-	-	H95	-	H93	H92	H90
	Output 1	Byte 2	-	-	-	-	-	-	H1
	Control and ACK	Byte 3	Q.PF	Q.G	-	-	X6.5	X6.4	X6.2

DA = Diagnostic active
CF = Connection faulted
RM = Run mode
FI.UK = D and B and L

FI.SK = D and B
FI.L = Guard locking
FI.B = Bolt position
FI.D = Door position

D.LT = Lifetime
D.OL = Guard locking
D.ES = Emergency stop
D.PF = Plausibility fault

FO.L = Guard locking
Q.PF = Acknowledge plausibility fault
Q.G = Acknowledge all

Betriebsanleitung beachten
(bei Abweichungen zwischen
Datenblatt u. Betriebsanleitung
gelten die Daten des Datenblattes)

**Please observe the
operating instructions**
(in case of disagreement between
data sheet and operating instructions,
the information of the data sheet
are to be considered)