




Maße in mm / Dimensions in mm  
© EUCHNER GmbH + Co. KG  
no responsibility is accepted for the accuracy of this information.  
Subject to technical modifications;  
alle Angaben ohne Gewähr / Subject to technical modifications;  
Technische Änderungen vorbehalten, alle Angaben ohne Gewähr

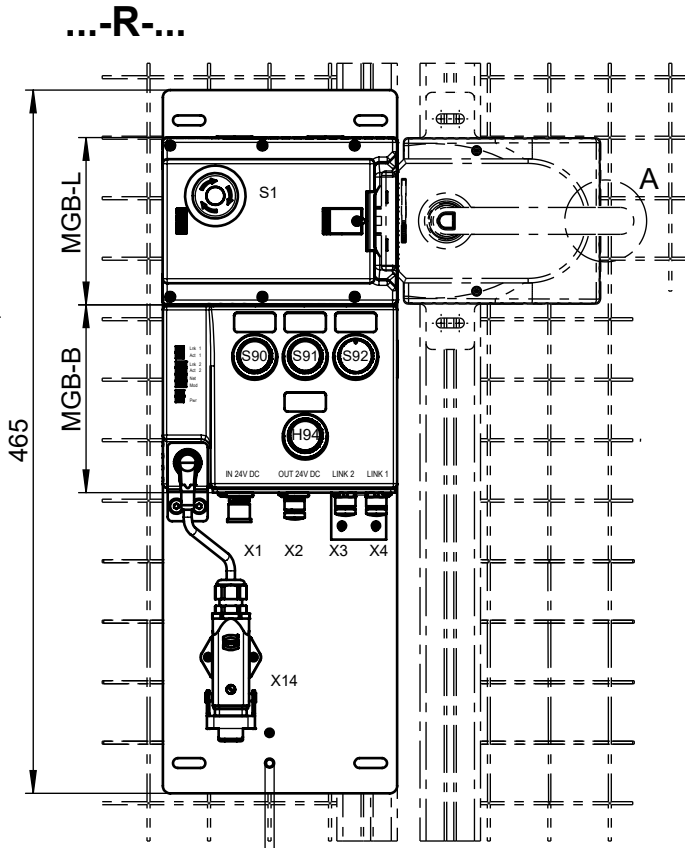



inklusive Funktionserde function earth included

- X1** M12 A-coded (Stecker/ male) 4-polig
- X2** M12 A-coded (Buchse/ female) 4-polig
- X3 / X4** M12 D-coded (Buchse/ female) 4-polig
- X14** Harting HAN 8D-M (Stecker / male) 8-polig
- EN** (Zustimmtaster / Enabling Switch)

Anschlussbelegung / PIN assignement

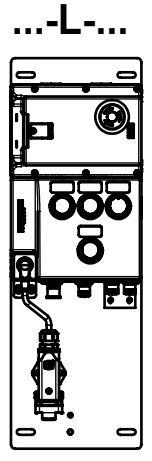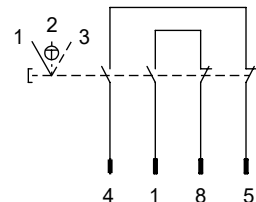

**Detail A**  
Sperrverriegelung im ausgefahrenen Zustand  
Automatic lockoutbar in "open" position.

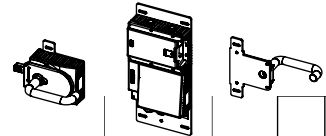

	MGB-H	MGB-L...	MGB-E...	Türanschlag Door hinge	S1 (ES)	S90 Taster beleuchtet Push-button illumina	S91 Taster beleuchtet Push-button illumina	S92 Taster beleuchtet Push-button illumina	H94 Leuchtvorsatz Signal indicator
MGB-L2B-EIA-R-126148		X		R	NOT-HALT Taster beleuchtet				
<b>MGB-L2HB-EIA-R-136426</b>	X	X				WEISS WHITE	WEISS WHITE	BLAU BLUE	GRÜN GREEN
MGB-L2B-EIA-L-136425		X		L	Emergency stop illuminated				
<b>MGB-L2HB-EIA-L-136427</b>	X	X							

**Inklusive:**  
4 Stück Einlegeschilder  
silberfarben, selbstklebend.  
(12,5x27mm)

**Included:**  
4 pcs. insertion plates, silver,  
self-adhesive. (12,5x27mm)

**Inklusive:**  
1x Blindstecker

**Included:**  
1x blanking plug

**Achtung**  
IP Adresse: 136.129.4.[DIP Schaltercode, binär]  
Subnet Mask: 255.255.248.0

**Attention**  
IP address: 136.129.4.[DIP swith code, binary]  
Subnet Mask: 255.255.248.0

**Betriebsanleitung beachten**  
(bei Abweichungen zwischen  
Datenblatt u. Betriebsanleitung  
gelten die Daten des Datenblattes)

**Please observe operating  
instructions**  
(in case of disagreement between  
data sheet and operating instructions,  
the information of the data sheet  
are to be considered)

**EtherNet / IP**

Datenbytes / Data bytes	Datenblöcke / Data blocks	Eingangsbereich / Input range:	Bit	7	6	5	4	3	2	1	0	
Standardfunktionen Standard functions	Connection header	Slot 1	Byte 0	-	-	-	-	-	DA	CF	RM	
	Connection header		Byte 1	DiagnosticSequenceCount								
	Connection header		Byte 2	-	-	-	-	-	-	-	-	
	Connection header		Byte 3	-	-	-	-	-	-	-	-	
	Failsafe input 0		Byte 4	-	-	-	-	-	-	FI.EN	FI.ES	
	Failsafe input 1		Byte 5	FI.UK	FI.SK	-	-	-	-	FI.L	FI.B	FI.D
	Input 0		Byte 6	-	-	-	S92.1	-	S91.1	-	S90.1	
	Input 1		Byte 7	-	-	-	-	-	-	-	-	
	Input 2		Byte 8	-	-	-	-	-	-	-	-	
	Diagnostics		Byte 9	D.LT	-	D.OL	-	D.EN	D.ES	D.PF	-	
	Fault code		Byte 10	FaultCode								
Fault code	Byte 11	FaultCode										

Sichere Funktion Safe function (FO.)	Datenbytes / Data bytes	Datenblöcke / Data blocks	Ausgangsbereich / Output range:	Bit	7	6	5	4	3	2	1	0
Standardfunktionen Standard functions	Failsafe output 0	Slot 1	Byte 0	-	-	-	-	-	-	-	-	FO.L
	Output 0		Byte 1	-	-	-	H94	-	H92	H91	H90	
	Output 1		Byte 2	-	-	-	-	-	-	-	H1	
	Control and ACK		Byte 3	Q.PF	Q.G	-	-	-	-	-	-	

DA=Diagnostic active      FLSK=D and B      D.LT=Lifetime  
CF=Connection faulted      FI.L=Guard locking      D.OL=Guard locking  
RM=Run mode      FI.B=Bolt position      D.ES=Emergency stop  
FI.UK=D and B and L      FI.D=Door position      D.PF=Plausibility fault  
D.EN=Enabling Switch      Q.G=Acknowledge all