

Connection of CET4-AP to MURR MVK-MPNIO



Content

Guard locking power applied – spring released according to EN ISO 14119 (open-circuit current principle) 2

Components/modules used..... 2

 EUCHNER 2

 Other 2

Functional description 3

 General..... 3

 Connections 3

Safety assessment 3

Principle circuit diagram..... 4

Parameter assignment in the control system 5

 Output MVK-MPNIO F DI8/4 F DO4 5

 Input MVK-MPNIO F DI8/4 F DO4..... 6

Important note – please observe carefully!..... 7

Subject to technical modifications, no responsibility is accepted for the accuracy of this information. © EUCHNER 2016

**Guard locking power applied – spring released according to EN ISO 14119
(open-circuit current principle)****Safety function**Guard locking for process protection with interlocking according to
EN ISO 14119**Reliability figures according to EN ISO 13849** Category 4, PL e**Components/modules used****EUCHNER****Description****Order no./item designation**Safety switches with guard locking and guard lock
monitoring with transponder technology 112082 / CET4-AP-CRA-AH-50X-SI-112082 from V1.5Tip: More information and downloads about the above mentioned EUCHNER products can be found at www.EUCHNER.de. Simply
enter the order number into the search field.**Other****Description****Items**

MVK-MPNIO F DI8/4 F DO4 Safety Module

55561

Functional description

General

The CET4 is a guard locking device according to EN ISO 14119 using the open-circuit current principle. In this example, the guard locking is controlled by a safe output from a MVK-MPNIO Safety-Module. The two safe outputs of the CET4 are connected to an MVK-MPNIO Safety-Module. The maximum line length from the MVK-module to the safety switch is 30m.

Connections

Designation	Function	Use in this example
OA, OB	Safety outputs. HIGH when the safety guard is closed and locked.	Switch-off of at least one of the outputs must lead to shutdown of the machine or installation via the connected control system. Important: The actual shutdown of the energy which is causing a hazard in a machine is not shown in the example and must be supplemented.
+UCM, 0V (UCM)	Control input for guard locking solenoid. Connect guard locking to 24 V DC to close.	Dual-channel controlled by an F-DO output. Important: According to EN ISO 14119, it shall be ensured that the hazard caused by a machine has disappeared before the guard locking can be released.

Safety assessment

The CET4 features complete monitoring for faults in the safety-relevant parts and in the connected cables (clock pulses at outputs OA and OB). With the device's own pulsing, switch-off or non-connection of the clock signals from the MVK-MPNIO Safety-Module safe inputs does not lead to a reduction in the PL. The example achieves PL e in accordance with EN ISO 13849-1 for the interlocking of a guard.

In exceptional cases in accordance with the risk assessment, guard locking can also be used for safety-relevant purposes. More detailed information about this can be found in EN ISO 14119. In this case, locking mechanism position monitoring of guard locking can also meet the requirements of PL e.

A safety assessment for control of guard locking is not part of this example and must be supplemented for the respective machine by the design engineer in accordance with the risk assessment.

Principle circuit diagram

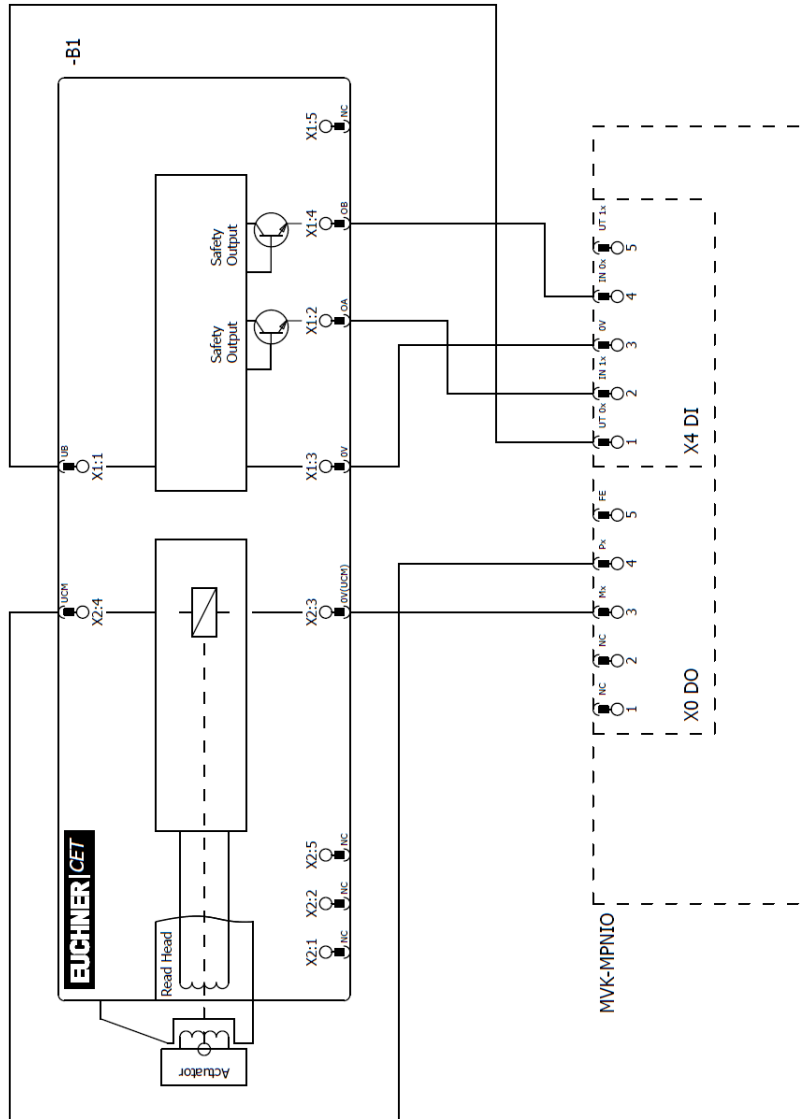


Figure 1

Parameter assignment in the control system

Output **MVK-MPNIO F DI8/4 F D04**

This parameter assignment applies only for the following assemblies:

- **MVK-MPNIO F DI8/4 F D04 Safety Module - 55561**

PROFIsafe	Value
	According to the specific application and requirements from Murr electronic (see manual)

Parameter	Value
Device Parameter	Corresponding to the use in Profinet
DO 0 Pin 4	Active
Read-back time	4 (ms)
Wire break detection	Optional

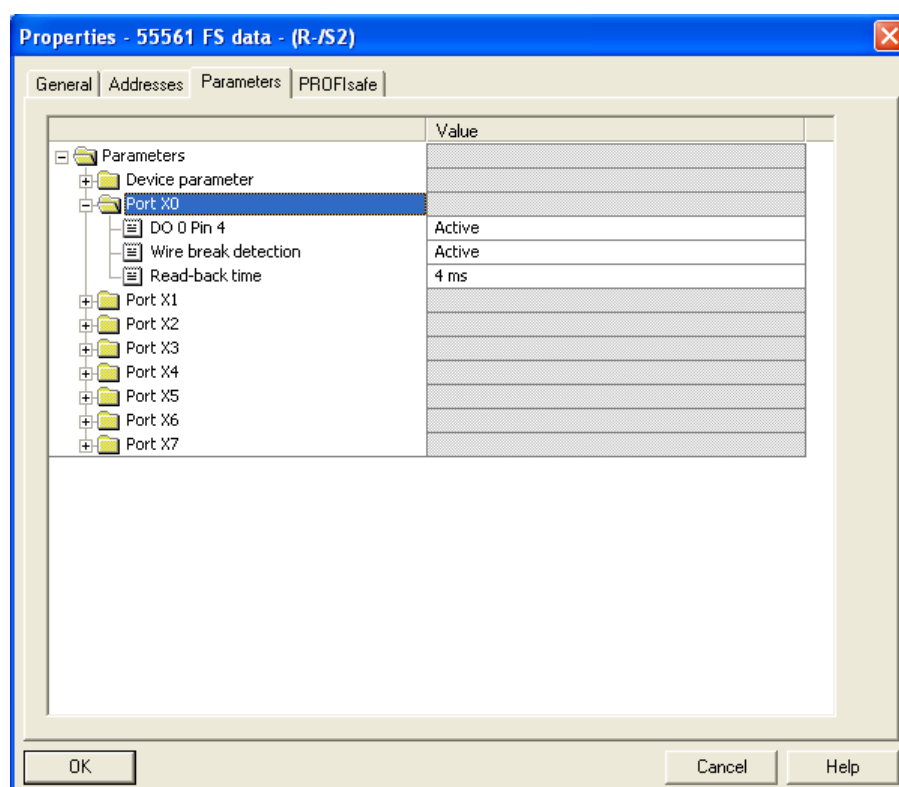


Figure 2

Input MVK-MPNIO F DI8/4 F DO4

This parameter assignment applies only for the following assemblies:

- **MVK-MPNIO F DI8/4 F DO4 Safety-Module - 55561**

Parameter	Value
DI 4 Pin 2	active
DI 4 Pin 4	active
Test signal Pin 5 to Pin 2	inactive
Test signal Pin 1 to Pin 4	inactive
Sensor analysis	1oo2
Sensor valence	2 channel equivalent
Discrepancy error behavior	optional
Discrepancy time	optional
Discrepancy error correction	optional
Input delay time	10ms
Debouncing time	inactive
Check time	optional
Stabilization time	optional

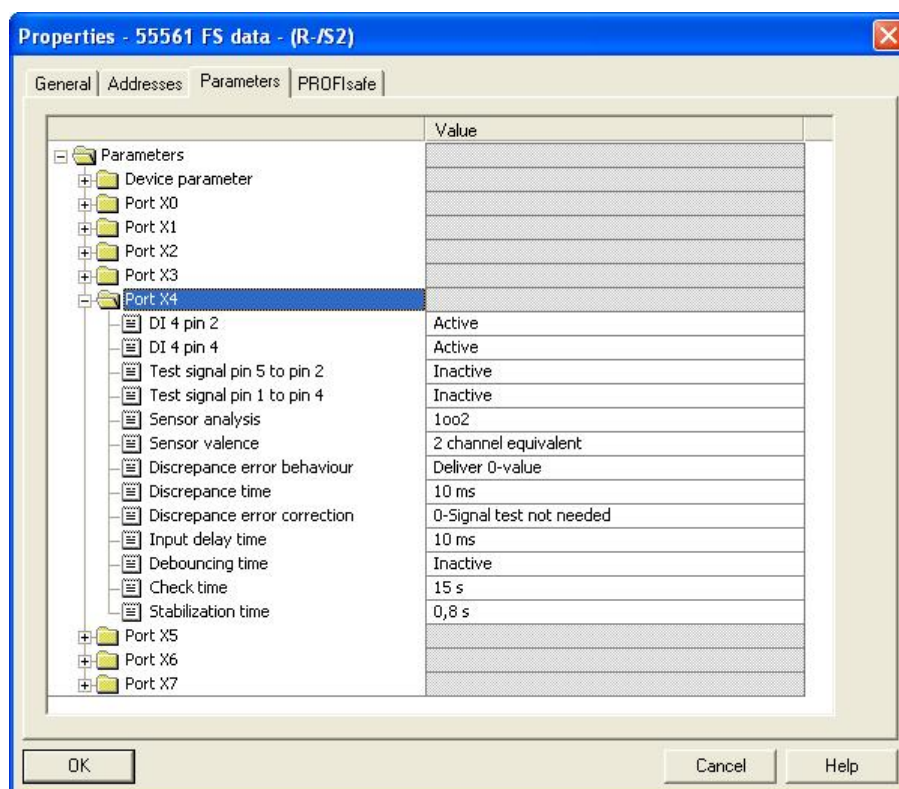


Figure 3

Important note – please observe carefully!

This document is intended for a design engineer who possesses the requisite knowledge in safety engineering and knows the applicable standards, e.g. through training for qualification as a safety engineer. Only with the appropriate qualification is it possible to integrate the introduced example into a complete safety chain.

The example represents only a part of a complete safety chain and does not fulfill any safety function on its own. In order to fulfill a safety function, the energy switch-off function for the hazard location and the software within the safety evaluation must also be considered, for example.

The introduced applications are only examples for solving certain safety tasks for protecting safety guards. The examples cannot be comprehensive due to the application-dependent and individual protection goals within a machine/installation.

If questions pertaining to this example remain open, please contact us directly.

In accordance with Machinery Directive 2006/42/EC, the design engineer of a machine or installation is obligated to perform a risk assessment and take measures to reduce the risk. When doing this, the engineer must comply with the applicable national and international standards. Standards generally represent the current state of the art. Therefore, the design engineer should continuously inform himself about changes in the standards and adapt his considerations to them. Relevant standards include EN ISO 13849 and EN 62061. This application must be regarded only as assistance for the considerations about safety measures.

The design engineer of a machine/installation is obligated to assess the safety technology himself. The examples must not be used for assessment, because only a small excerpt of a complete safety function was considered in terms of safety engineering here.

In order to be able to use the safety switch applications correctly on safety guards, it is indispensable to observe the standards EN ISO 13849-1, EN ISO 14119 and all relevant C-standards for the respective machine type. Under no circumstances does this document replace the engineer's own risk assessment, and it cannot serve as the basis for a fault assessment.

Particularly in case of a fault exclusion, it must be noted that this can be performed only by the design engineer of a machine or installation and requires a reason. A general fault exclusion is not possible. More information about fault exclusion can be found in EN ISO 13849-2.

Changes at products or within assemblies from third-party suppliers used in this example can lead to the function no longer being ensured or the safety assessment having to be adapted. In any event, the information in the operating instructions on the part of EUCHNER, as well as on the part of third-party suppliers, must be taken as the basis before this application is integrated into an overall safety function. If contradictions should arise between the operating instructions and this document, please contact us directly.

Use of brand and company names

All mentioned brand and company names are property of the respective manufacturers. The use is only for clear identification of compatible peripheral devices and environment of operation in combination with our products.